

HANDY NORTH AMERICA H110E-A

TYPE	Pass-through dishwasher
LINE	HANDY NORTH AMERICA
BASKET	500x500 (20"x20")
SIZE	620x770x1435/1900 - 24" ¹ / ₂ W x 30" ¹ / ₄ D x 74" ³ / ₄ H



CERTIFIED



ON REQUEST



Functions and benefits without compromise, all with lower running costs and at a very reasonable price.

Stainless steel: Adjustable rotation speed rinse arms, integral tank filter, Detergent injector welded to the tank.

Multi power: Adapt the power level to your needs (field convertible).

LCD controls: Simple digital control panel with digital temperature display for intuitive and user-friendly operation.


This model is **ETL certified** as it complies with the **UL Std.921** requirements.

60 years of experience with evolving technology has produced the HANDY H110E-A. Thesis offers a professional wash system, designed and created to provide excellent cleaning, hygiene and brightness. The HANDY hood-type dishwasher is an ideal solution for establishments that have to wash different types of dishes, glasses and hotel/gastronom pans. Simple to use for heavy duty applications with low maintenance. We guarantee an impeccable wash quality, which can meet even the needs of the most sophisticated customers.

High-quality products built using durable stainless steel with electromechanical components. The H110E-A is designed for energy savings with lower water and detergent consumption.

Technical features

- Control panel with LCD display
- EWC System, electronic control with 4 individual programmable cycles
- Energy saving start cycle system (washing cycle started only with push pressure on the closing handle)
- Drain pump optional (Ecology Care system for partial refilling of clean water every washing cycle)
- Vacuum breaker valve
- Integral stainless steel tank filter + New filtering group for suction and drain
- Racks supplied: 2 dish baskets, 1 glass basket, and 2 cutlery trays
- 1-year parts and labour warranty
- Adjustable 3L/hour detergent dispenser
- Adjustable 0.3L/hour rinse-aid dispenser
- 60 racks/hour or approximately 35 racks/hour in accordance to NSF standards

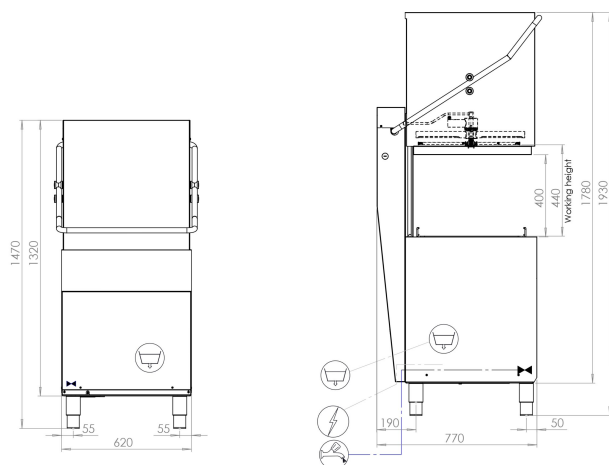

DISHWASHERS FEATURES

Dimensions - (mm) L - P - H	620x770x1435/1900 - 24"½W x 30"¾D x 74¾"H
n° baskets/hour - (+55°C)	Max 60
Height glass max	390mm
Ø height plate max	415mm
LT bread basket	40 (H=390mm)
Trays	GN1/1
Tank heating element - Tank capacity	4,5kW - 37lt (9.8gal)
Boiler heating element - Boiler capacity	5,4kW - 7,3lt (1.9gal)
Washing pump	1,34kW / 1,5Hp
Total power input / Current	6,52kW / 30A
Standard input voltage	208/220V - 50/60Hz - 1HP
Recommended inlet water temperature	+55°C (125°F)
Water hardness	7÷10 °f
Water consumption per cycle (inlet suggested pressure 2 BAR)	2,0lt
Adjustable detergent and rinse-aid dispenser	ELECTRIC
Packing	710x960x1520h - 1,04 - 120kg (265lbs)

STANDARD EQUIPMENT

Basket for glasses dim.500x500x100mm	1
Basket for 18 dishes dim.500x500x100mm	2
8 division cutlery insert	1
Integral tank filter	2

OPTIONAL

Drain pump kit 32W with Ecoclean	●
Basket for trays with 4 compartments dim.500x500x200mm	●
Inclined basket for wine glasses dim.500x500x170mm	●
Kit 4 Stainless steel feet 50-70mm	-

● Optional Installabile, - Optional not installabile